


# LIGHTFORMS Family



## Encircle Your Space.

Creatively join segment arcs together to form half-circles, S-shapes, ovals and other curved configurations. LIGHTFORMS can also be joined with straight sections.




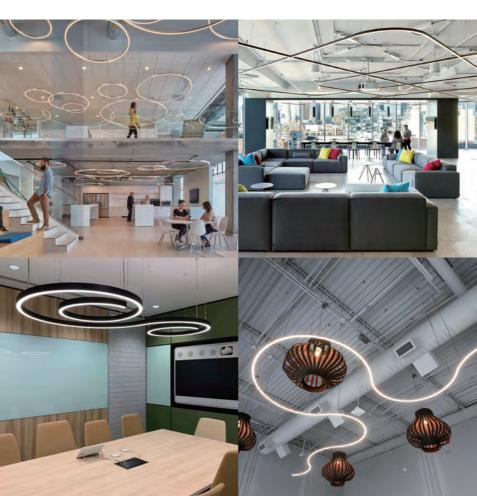

## Color Your Space.



All LIGHTFORMS products are available in Tiger Drylac catalog colors or custom color for maximum flexibility!

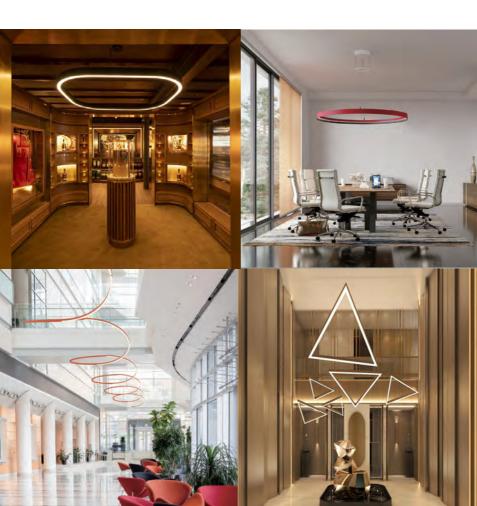

## **Quiet Performance.**



We provide a list of different materials to customize the products to your needs.











## **LIGHTFORMS 1 - SERPENTINE**

MODEL: MR1SS3

Features

Power: max. 11W per ft

Lumen: max. 1222 lumen per ft CCT: 3000K / 3500K / 4000K

CRI: >90


Dimming: 0-10V / DALI / DMX / Phase

### Dimension

Customized within a minimum radius of 11.81"





















## **LIGHTFORMS** 1 - FLAMING RING

MODEL: MR1FR

### Features

Power: max. 8.28W per ft Lumen: max. 850 lumen per ft CCT: 3000K / 3500K / 4000K / RGB

CRI: >90


Dimming: 0-10V / DALI / DMX / Phase

#### Dimension

Customized within a minimum radius of 11.81"





















## **LIGHTFORMS 1 - SNAKE**

MODEL: LPL1SN

## Features

Power: max. 8.28W per ft Lumen: max. 850 lumen per ft CCT: 3000K / 3500K / 4000K / RGB

CRI: >90


Dimming: 0-10V / DALI / DMX / Phase

### Dimension

Customized within a minimum radius of 11.81"

























## **LIGHTFORMS 1 - ROUND**

MODEL: LPL1RD

## Features

Power: max. 11W per ft

Lumen: max. 1250 lumen per ft CCT: 3000K / 3500K / 4000K / RGB

CRI: >90

Dimming: 0-10V / DALI / DMX / Phase




Customized within a minimum radius of 11.81"





















## **LIGHTFORMS** 1 - COLLIER

MODEL: MR1CLL

## Features

Power: max. 11W per ft Lumen: max. 1222 lumen per ft

CCT: 3000K / 3500K / 4000K

CRI: >90

Dimming: 0-10V / DALI / DMX / Phase




Customized within a minimum radius of 11.81"



**UP&DOWN** 























## LIGHTFORMS 1 - BEE

MODEL: LPL3-BE

## Features

Power: max. 11W per ft

Lumen: max. 1222 lumen per ft CCT: 3000K / 3500K / 4000K / RGB

CRI: >90

Dimming: 0-10V / DALI / DMX / Phase


## Dimension


Customized within a minimum radius of 11.81"

























# **LIGHTFORMS 1 - BEE**

MODEL: LPL3-BE

## Features

Power: max. 11W per ft Lumen: max. 1222 lumen per ft CCT: 3000K / 3500K / 4000K / RGB

CRI: >90

Dimming: 0-10V / DALI / DMX / Phase

#### Dimension

Customized within a minimum radius of 300mm



























## **LIGHTFORMS 1 - WAVES**

MODEL: LPL1WAV

## Features

Power: max. 11W per ft

Lumen: max. 1222 lumen per ft CCT: 3000K / 3500K / 4000K / RGB

CRI: >90


Dimming: 0-10V / DALI / DMX / Phase


### Dimension

Customized within a minimum radius of 300mm





















**LIGHTFORMS 2 - THE SOLID** 







## **LIGHTFORMS 2 - MOONFOL**

MODEL: LPL1MF-T

### Features

Power: max. 60 - 240W

Lumen: max. 6000- 24000 lumen CCT: 3000K /

3500K / 4000K / RGB

CRI: >90

Dimming: 0-10V / DALI / DMX / Phase

## Dimension

Customized























## **LIGHTFORMS 2 - GEMINIS**

MODEL: GEM3-E

Features

Power: max. 50 - 120W


Lumen: max. 5000 - 12000 Lumen CCT: 3000K / 3500K / 4000K / RGB

CRI: >90

Dimming: 0-10V / DALI / DMX / Phase

#### Dimension Customized


















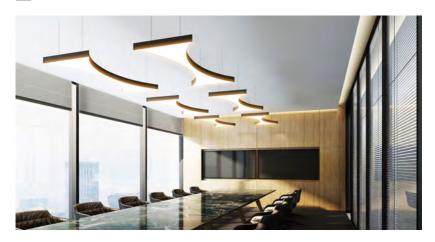

## **LIGHTFORMS 2 - LIBRA**

MODEL: MR2SS-LB

Features

Power: max. 16 - 80W

Lumen: max. 1600 - 8000 lumen CCT:

3000K / 3500K / 4000K

CRI: >90

Dimming: 0-10V / DALI / DMX / Phase

## Dimension

Customized
























## **LIGHTFORMS 3 - OVNI**

MODEL: MR2SS

#### Features

Power: max. 11W per ft Lumen: max. 1222 lumen per ft CCT: 3000K / 3500K / 4000K


CRI: >90


Dimming: 0-10V / DALI / DMX / Phase

#### Dimension

Customized within a minimum radius of 11.81"





















## **LIGHTFORMS 3- ASTORIA RING**

MODEL: MR2FR

### Features


Power: max. 11W per ft Lumen: max. 1222 lumen per ft CCT: 3000K / 3500K / 4000K

CRI: >90

Dimming: 0-10V / DALI / DMX / Phase

### Dimension

Customized within a minimum radius of 11.81"



















## **LIGHTFORMS 3 - VOLCAN**

MODEL: LPL2.5VL

### Features

Power: max. 11W per ft Lumen: max. 1222 lumen per ft CCT: 3000K / 3500K / 4000K / RGB


CRI: >90


Dimming: 0-10V / DALI / DMX / Phase

#### Dimension

Customized within a minimum radius of 11.81"



















## **MOONRING 3 - RECESSED** MODEL: LPL2.5MD-RT

### Features

Power: max. 11W per ft

Lumen: max. 1222 lumen per ft CCT: 3000K / 3500K / 4000K / RGB

CRI: >90

Dimming: 0-10V / DALI / DMX / Phase

## Dimension

Customized within a minimum radius of 11.81"















